

Nova-line modell 1



Nova-line modell 1 är en modern pergolamarkis med stilrena linjer och en öppen design som inte behöver något tvärstag mellan bågarna upp till 5 meters bredd och 4,5m utfall. Finns bara i väggmonterat utförande. Klarar vind upp till vindklass 3, dvs max 13,8m/s. Kan anslutas i sida till fler enheter upp till 13m totalbredd och med tvärstag upp till 6m utfall.

Valbart tillbehör är bl.a. LED-belysning som fälls in i dukens tvärprofiler. Man kan även förse den med väderautomatik med sol,- vind- och regnsensorer. Standard med Techprotect vädertät duk. Tre standardfärger liknande RAL 9010ST (vit), 7016ST (Antracitgrå metallic) och 9007 (Alugrå).




9010ST



7016ST



9007



Pergolarum.se




Pergolarum.se



Pergolarum.se

FABRIC BUNDLE

Calculation table for the bundle and fabric visor

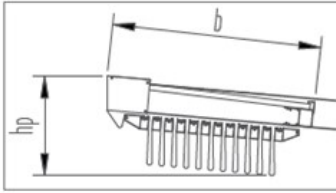


P [cm]	b[cm]	l [pc]	hp [cm]
200	53	4	45
250	59	5	45
300	65	6	46
350	71	7	46
400	77	8	47
450	83	9	47
500	89	10	48
550	95	11	49
600	101	12	50



The total height of a folded fabric varies, depending on the spacing between the wind-resistant beams. On request, spacing can be reduced, so reducing the total height of the folded fabric (hp).

S [%]	L [cm]
Minimum Slope	Maximum distance between guides
6-7	200
7-8	200-250
8-10	250-300
10-12	300-350
12-14	350-400
14-16	400-450
≥17	450-500


Calculation table for roof slopes regarding the distance between the guides.

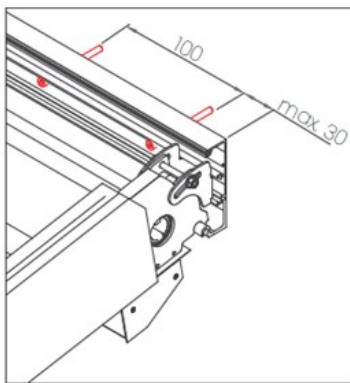


INSTALLATION OF STARTING PROFILE

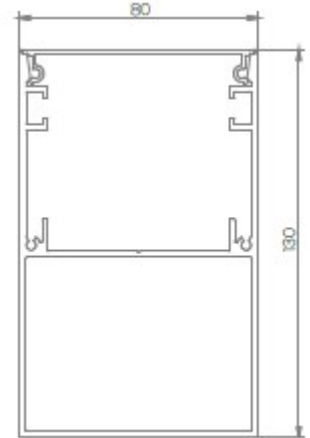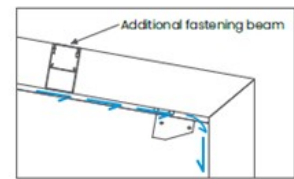


FRONT VIEW

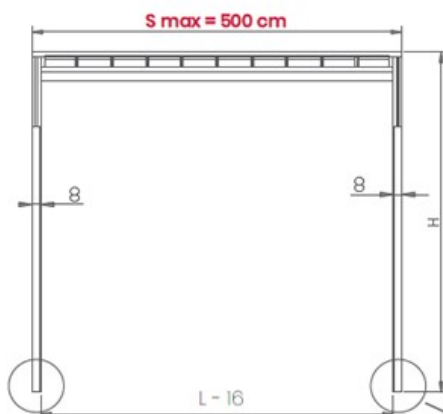


POST FIXING PLATE

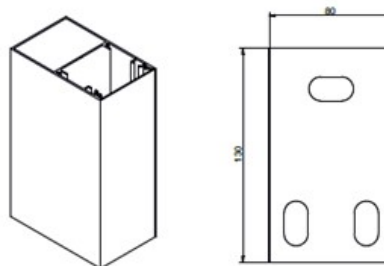

POSITION OF EXTERNAL FIXING PLATES

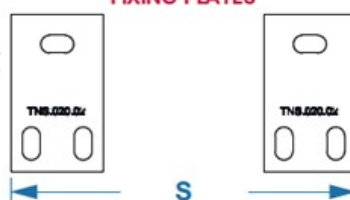

FIXING PLATE EXTERNAL

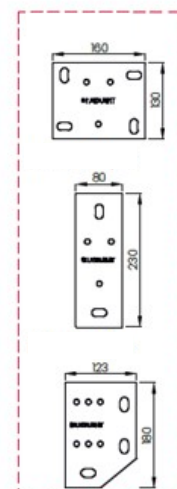


UNPAINTED STAINLESS STEEL



Pergolarum.se

LAYOUT EXAMPLE

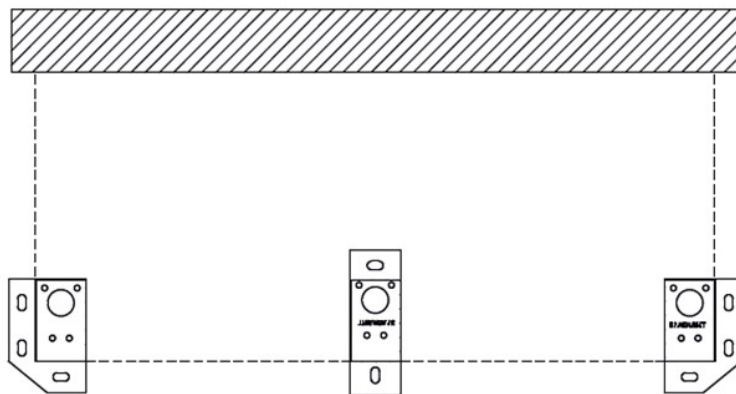

Standard tvåfärgad Techprotect duk med ljus undersida



white/ white 112



grey/ light grey 877



cream/ cream 272



grey/ cream 878



bordeaux/ cream 444



anthracite/ cream 815



taupe/ cream 819



green/ cream 632



Pergolarum.se